


## NBS-3452

2-section anodised aluminium telescopic mast

45mm O.D. base

3.0 metres - Packed

5.69 metres - Extended

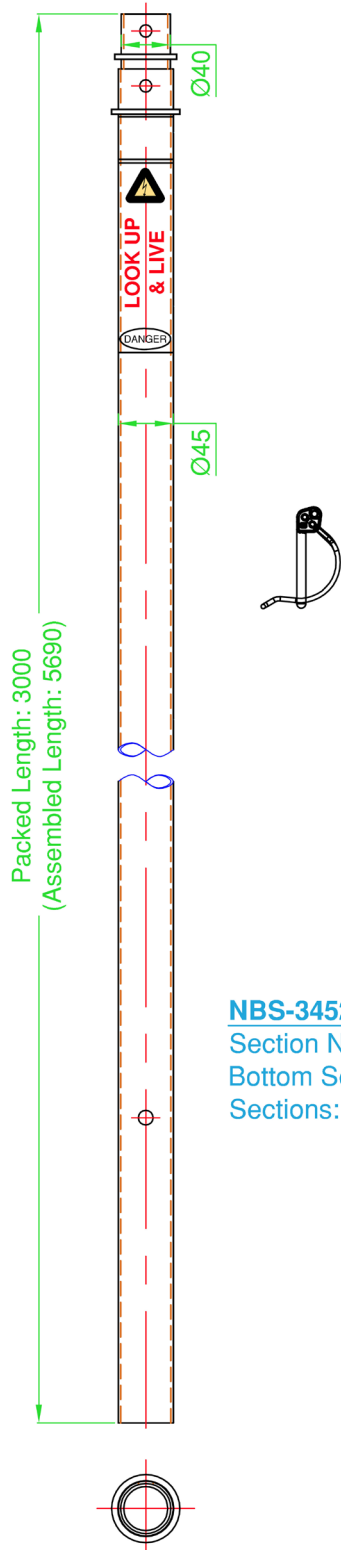

### Specifications

Construction	Clear anodised aluminium telescopic sections with section stop guides and passivated D-locking clips
Number of Sections	2
Retracted Height	3.0 metres / 9.85 ft
Extended Height	5.69 metres / 18.67 ft
Weight - excl. D-clips	4.0 kg / 8.82 lbs
Wind Load rating - Max.	160 kph / 99mph - with each section guy wire supported
Top section load rating	3.0kg / 6.61 lbs
Max. surface area	0.2m <sup>2</sup>
Base Section Dimension	O.D: 45mm / 1.77"
2nd Section Dimensions	O.D: 40mm / 1.57"
Supplied Accessories	1 x gold passivated section D-clips

### Required Accessories - order quantity separately to suit 3/4 configuration

Guy Wire - High strength nylon <i>Single units, order by quantity required either 3 or 4 at each section For stainless steel see NBS-GW series</i>	NBS-GR5 - 5 metre guy wire for base section NBS-GR10 - 10 metre guy wire for top section
Anodised Aluminium Guy Rings - free rotating <i>single unit required - per mast</i>	NBS-AGR46 - Suits 45mm O.D. bottom section NBS-AGR41 - Suits 40mm O.D. top section

### Optional Accessories - order separately to suit configuration

Mount Bases	NBS-45WStand - drive-on/underwheel static stand NBS-45TStand - drive-on/underwheel tilt stand NBS-45TBMount - tow-bar socket mount NBS-BS45 - static flat roof/ground stand
Antenna/Equipment mounts	A-2871-2 - 1.3m top accessory mount tube 35.5mm O.D., includes 'D' locking clip